




Instr. No. 2650-726A

INSTALLATION INSTRUCTIONS Z-SERIES 2 1/16" DIA. ELECTRONIC TACHOMETER MODEL 2697 & 2698



Mounting


1. Can be mounted in a 2 1/16" dia. hole in the dashboard. (Take care that hole is not cut too large.) Can also be mounted in a standard aftermarket street rod panel.
2. Cut a 3/8" dia. hole in the firewall where the tachometer wires will be routed. Place rubber grommet in hole and route the connector wires through to the engine compartment.
3. Connect the tachometer wires as shown below.
4. Secure the tachometer in the dashboard using the bracket, thumbnuts and lockwashers provided.

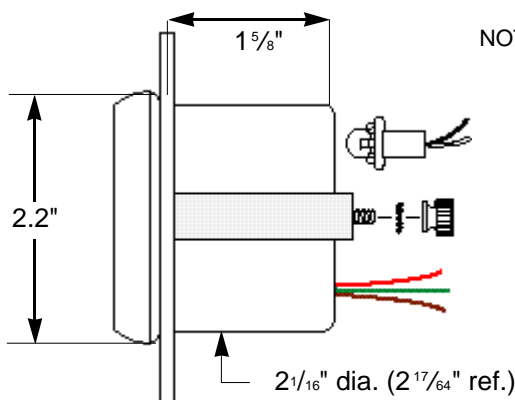

NOTE: With the ignition switch off, the tach pointer may not always rest at zero. This is normal. When engine is started, pointer will position on the correct rpm.

Wiring

WARNING
Incorrect hookup will damage tachometer and void warranty. Please read these instructions.

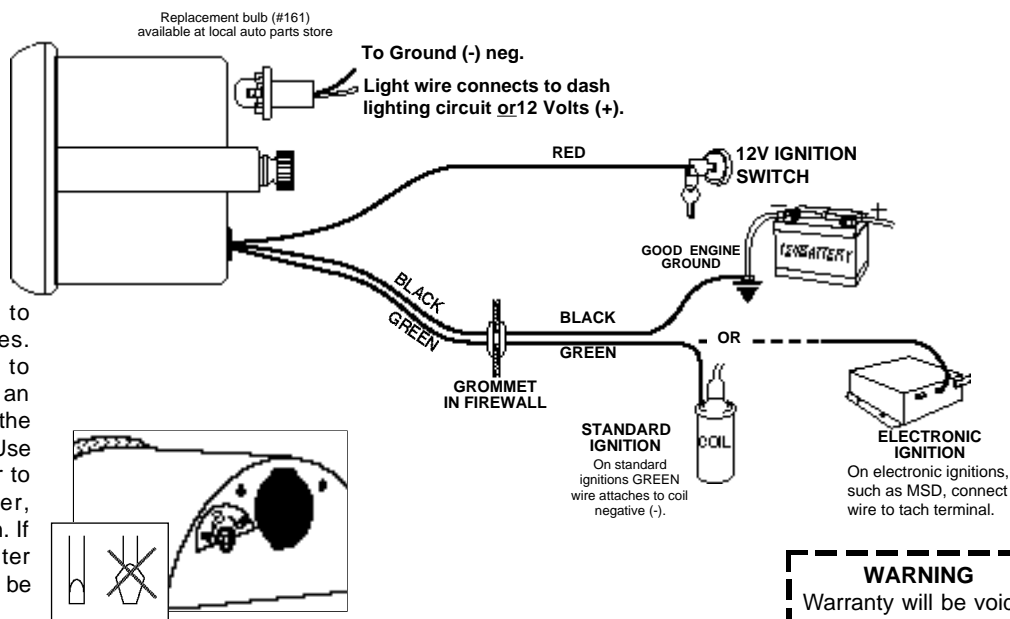

NOTE: This tachometer is designed to operate with 4, 6 or 8 cylinder engines. Insert a small standard screwdriver to adjust to desired setting. Using an incorrect size screwdriver can damage the tachometer and will void the warranty. Use a 3/32" straight (jewelers) screwdriver to adjust cylinder setting. For 4 cylinder, switch should be to the fully left position. If used on 6 cylinder, turn switch to center position and for 8 cylinder switch should be fully to the right

WARNING
Warranty will be void if connected to coil on MSD ignitions.
Attach only to Tach Terminal.

SERVICE

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. If you need it back immediately mark the outside of the box "RUSH REPAIR," and Auto Meter will service product within two days after receiving it. (\$10.00 charge will be added to the cost of "RUSH REPAIR.") If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

12 MONTH LIMITED WARRANTY

Auto Meter Products, Inc. warrants to the consumer that all Auto Meter High Performance products will be free from defects in material and workmanship for a period of twelve (12) months from date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at Auto Meter's option to the consumer, when it is determined by Auto Meter Products, Inc. that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter instruments. In no event shall this warranty exceed the original purchase price of the Auto Meter instruments nor shall Auto Meter Products, Inc. be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the instrument seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Products, Inc. disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter.

FOR SERVICE SEND TO: **AUTO METER PRODUCTS, INC.** 413 W. Elm St., Sycamore, IL 60178 USA (815) 895-8141
Email us at service@autometer.com