



Instr. No. 2650-870

INSTALLATION INSTRUCTIONS HONDA TACH POD INSTALLATION For 1992-1995 Honda Civic



1. Remove Mounting Bracket

Remove the mounting bracket from the tach. The bracket is not required for installation. Clean the tape from the tach and the shift light.




2. Drill Hole For Wiring

Clip the shift light onto the tach pod to determine the hole location for the shift light wires to pass through. Drill a 1/2" hole.




3. Install Shift Light

With putty knives in place, mount the shift light to the tach pod and make sure it is firmly attached.

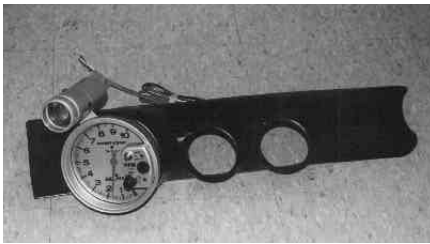

4. Install Tach and Gauges

Press tach and passenger side gauge into place. Leave center gauge out. Gauges are press fit so no hardware is required to hold gauges in place.

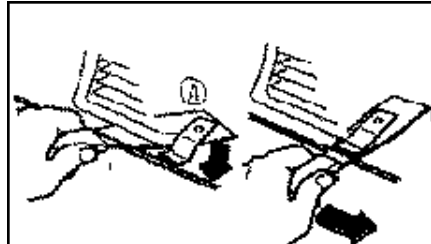

5. Releasing The Clips

Turn each putty knife until it is behind the clip, then pull it towards you until its blade is under the clip. Leave both knives in place.




6. Remove Passenger Vent

Remove the passenger side vent by gently prying up on both left and right sides simultaneously using a flat-tip screwdriver or a putty knife.




7. Attach Tach Pod Clip

Attach the Tach Pod clip on the passenger side, as shown in the above photograph.

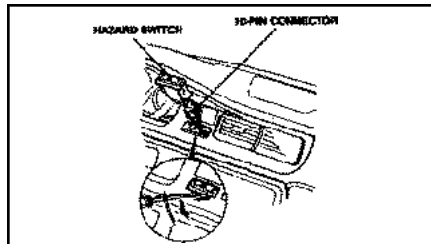


8. Remove Hazard Switch

Using a flat tip screwdriver, carefully lift the hazard switch out of the dash insert. Unplug the 10-pin connector and remove the switch.

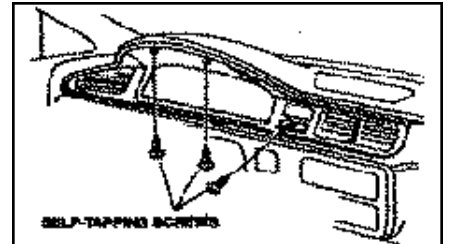


9. Remove Tapping Screws

Using your screwdriver, remove the three self-tapping screws securing the dash insert.

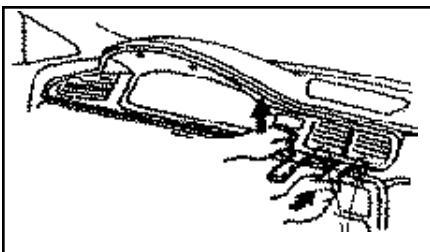

10. Prepare Release Of Clips

Starting on the right side of the center vent, insert two putty knives in the gap under the dash insert, next to the two clips.

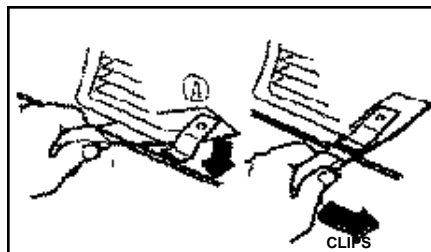


11. Releasing The Clips

Turn each putty knife until it is behind the clip, then pull it towards you until its blade is under the clip. Leave both knives in place.




12. Handling Dash Insert

Use the emergency flasher button hole to pull down and out on the dash insert.

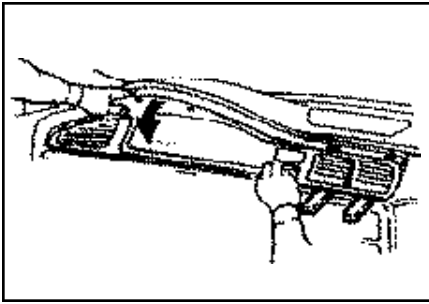

13. Releasing tabs (right side)

Pull top of instrument panel down and towards you until tabs on top and clips on bottom clear dash and the putty knives are loose.

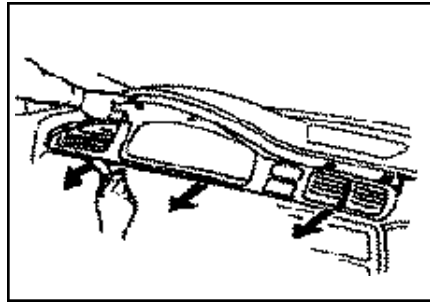

14. Release Insert (left side)

Release remaining clip with putty knife. (Same as shown in Step 5).



15. Removing Dash Insert

Grasp the top of the dash insert firmly then gently pull down then out.



16. Attach Tach Pod Clip

Attach the Tach Pod clip on the driver's side as shown in the above photograph.



17. Drill hole in vent housing

Drill 1/2" hole in vent housing for tach & gauge wiring to run through then down to firewall. Don't install center gauge. Install plate over center vent.



18. Installing Tach Pod

Reinstall dash. Use a flat tip screwdriver to lift up on clip allowing Tach Pod to slide under the passenger side clip into position.



19. Tighten Driver's Side Clip

Insert the screwdriver in the center gauge hole and tighten the hold down screw for the drivers side clip. Do not overtighten.



20. Installing Center Gauge

Insert the center gauge by pressing it into place. Gauges are press fit and no extra hardware is required to install them.

Auto Meter Gauge Works Limited Lifetime Warranty

Gauge Works warrants to the consumer that all Auto Meter Gauge Works products will be free from defects in material and workmanship. Products that fail will be repaired or replaced at Auto Meter Gauge Works' option to the consumer, when determined by Auto Meter Gauge Works that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter Gauge Works Product and the necessary labor done by Auto Meter Gauge Works to effect the repair or replacement of the Auto Meter Gauge Works product. In no event shall this warranty exceed the original purchase price of the Auto Meter Gauge Works product nor shall Auto Meter Gauge Works be responsible for special incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter Gauge Works must be transportation prepaid and accompanied with proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. Improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Gauge Works disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter Gauge Works. This warranty is made solely by Gauge Works with Auto Meter being the agent to contact for warranty claims. If the partnership between Auto Meter and Gauge Works dissolves, then all warranty adjustments will be covered by the Gauge Works Co.