


A-Pillar Mounting Pod — Single and Dual Installation Instructions


VDO[®] North America
Winchester, VA

Installation of the VDO A-Pillar Mounting Pod is quick and easy if you follow these simple instructions.

1. Identify the desired location where you will mount the A-Pillar Mounting Pod.

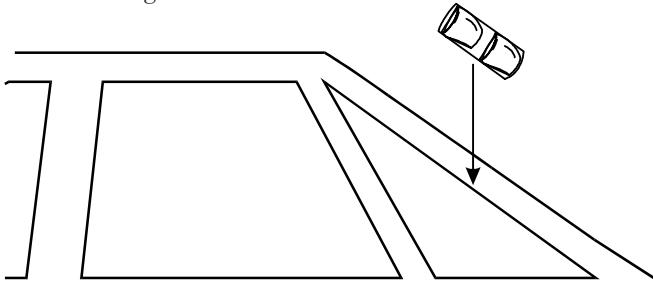


2. Position the pod on the A-Pillar.

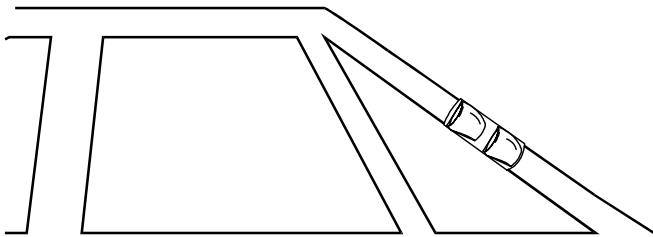

3. Mark this location on the A-Pillar, then remove the A-Pillar.

4. Create an opening in the A-Pillar for the gauge lines to pass through.

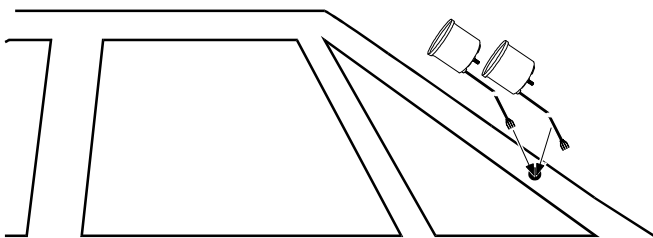

5. Install the gauge(s) into the pod. No hardware is needed for this installation.

6. Test fit the pod with the gauge(s) installed on the A-Pillar to insure sufficient clearance for the gauge lines and housing.

7. Run the gauge wires through the opening you created in the A-Pillar to the engine and connect the gauges as suggested by the manufacturer. Make sure no gauge lines are pinched in any way.

8. Identify the best location for double sided tape. Mark this location on the A-Pillar.

9. Use an alcohol pad to clean the surface of the A-Pillar where the double sided tape will be installed.

10. Use promoter on the A-Pillar where the surface has been cleaned and the tape will be installed.

11. Install the double sided tape on the A-Pillar.

12. Mount the pod on the A-Pillar.

13. Press and hold the pod onto the A-Pillar for approximately 30 seconds.

14. To secure the pod onto the A-Pillar permanently, you may use screws.

This completes the installation of the VDO A-Pillar Mounting Pod.

VDO Limited Warranty

VDO North America warrants all merchandise against defects in factory workmanship and materials for a period of 24 months after purchase. This warranty applies to the first retail purchaser and covers only those products exposed to normal use or service. Provisions of this warranty shall not apply to a VDO product used for a purpose for which it is not designed, or which has been altered in any way that would be detrimental to the performance or life of the product, or misapplication, misuse, negligence or accident. On any part or product found to be defective after examination by VDO North America, VDO North America will only repair or replace the merchandise through the original selling dealer or on a direct basis. VDO North America assumes no responsibility for diagnosis, removal and/or installation labor, loss of vehicle use, loss of time, inconvenience or any other consequential expenses. The warranties herein are in lieu of any other expressed or implied warranties, including any implied warranty of merchantability or fitness, and any other obligation on the part of VDO North America, or selling dealer.
(NOTE: This is a "Limited Warranty" as defined by the Magnuson-Moss Warranty Act of 1975.)